


Liquid Tight Connector With **PG** or Metric Threads **PG or Metric Liquid Tight Fittings (YZB)**


For use with both Metallic Liquid tight Conduit and PVC Coated Flexible Metal Conduit
Material: Zinc Die Cast, Zinc or Chrome Plated. Liquid Tight Conduit Fittings For machinery wiring

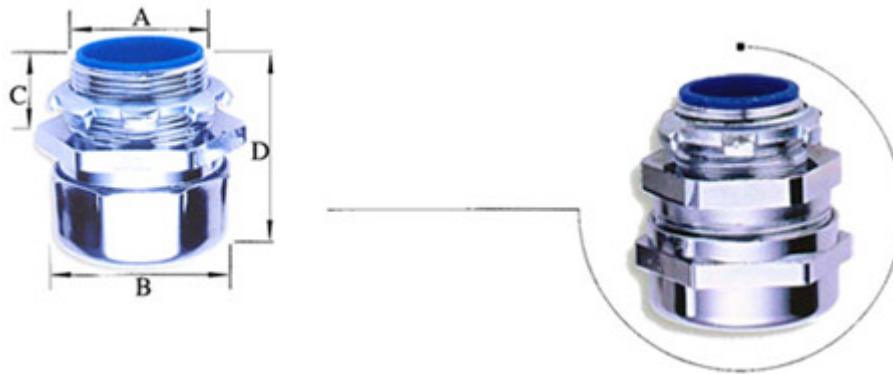

PG Threads Metal Liquid Tight Conduit Fittings (0 degree)


Model No.	For Conduit	Straight LT Connector Dimension (mm)					PG Thread
		I.D.	A	B	C	D	
YZB-0309	3/8"	10.0	15.2	30.0	9.0	36.5	PG9
YZB-0311	3/8"	10.7	18.6	30.0	6.5	36.5	PG11
YZB-0313	3/8"	10.7	20.4	30.0	6.5	36.5	PG13.5
YZB-0316	3/8"	10.7	22.5	30.0	6.5	36.5	PG16
YZB-0411	1/2"	14.5	18.6	35.5	9.0	38.0	PG11
YZB-0413	1/2"	14.5	20.4	35.5	9.0	38.0	PG13.5
YZB-0416	1/2"	14.5	22.5	35.5	9.0	38.0	PG16
YZB-0421	1/2"	14.5	28.3	35.5	9.0	38.0	PG21
YZB-0621	3/4"	19.3	28.3	43.0	9.0	38.0	PG21
YZB-1029	1"	24.4	37.0	48.0	11.0	50.0	PG29
YZB-1236	1-1/4"	33.4	47.0	58.0	11.0	52.0	PG36
YZB-1442	1-1/2"	38.0	54.0	64.2	15.0	60.0	PG42
YZB-2048	2"	48.8	59.0	86.6	20.0	80.5	PG48

Delikon PG and Metric Thread Liquid Tight Connectors provide a reliable connection for liquid tight flexible metal conduit and PVC coated flexible metal conduit. The compact design results in a connector that could be installed in a tight space. Delikon liquid tight connectors are often found on power plant, sensor, railway station, and various other equipment, enclosures, junction boxes. Delikon PG and Metric Thread Conduit Connector could be produced in a variety of materials and finishes for great looks and lasting durability.

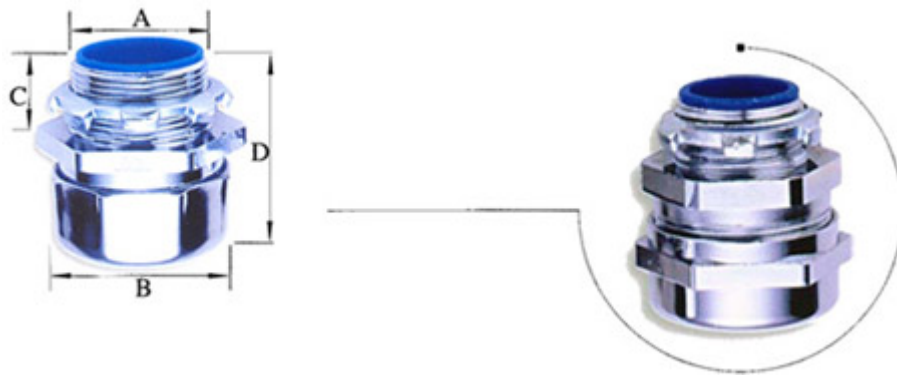


Metric Threads Metal Liquid Tight Conduit Fittings (0 degree)

Model No.	For Conduit	Straight LT Connector Dimension (mm)					METRIC Thread
		I.D.	A	B	C	D	
YZB-03M16	3/8"	10.7	16	30	12	39.5	M16
YZB-03M20	3/8"	10.7	20	30	13	40.5	M20
YZB-04M20	1/2"	14.5	20	35.5	13	42.0	M20
YZB-04M25	1/2"	14.5	25	35.5	13	42.0	M25
YZB-06M25	3/4"	19.3	25	40	13	42.0	M25
YZB-06M32	3/4"	19.3	32	40	15	44.0	M32
YZB-10M32	1"	24.4	32	46.5	15	54.0	M32
YZB-10M40	1"	24.4	40	46.5	15	54.0	M40
YZB-12M40	1-1/4"	33.4	40	58.0	15	56.0	M40
YZB-14M50	1-1/2"	38.0	50	64.2	19	64.0	M50
YZB-20M63	2"	48.8	63	86.6	25	85.0	M63
YZB-24M75	2-1/2"	59.4	75	103.0	22.0	62.0	M75
YZB-30M90	3"	75.8	90	120.0	22.0	65.0	M90
YZB-40M115	4"	97.6	115	157.0	24.0	72.0	M115
YZB-50M140	5"	123.0	140	175.0	30.0	75.0	M140
YZB-60M165	6"	137.0	165	200.0	30.0	80.0	M165

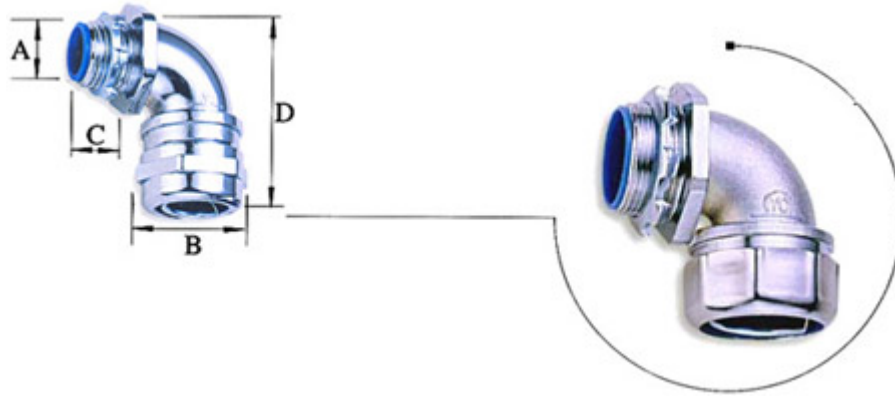


PG Threads Metal Liquid Tight Conduit Fittings (90 degrees)

Model No.	For Conduit	90 Degrees LT Connector Dimension (mm)					PG Thread
		I.D.	A	B	C	D	
YZL-0309	3/8"	10.7	15.2	30.0	8.5	54.0	PG9
YZL-0311	3/8"	10.7	18.6	30.0	8.5	54.0	PG11
YZL-0313	3/8"	10.7	20.4	30.0	8.5	54.0	PG13.5
YZL-0413	1/2"	14.5	20.4	35.5	8.5	57.0	PG13.5
YZL-0416	1/2"	14.5	22.5	35.5	12.5	57.0	PG16
YZL-0421	1/2"	14.5	28.3	35.5	12.5	57.0	PG21
YZL-0621	3/4"	19.3	28.3	43.0	14.0	67.0	PG21
YZL-1029	1"	24.4	37.0	48.0	17.5	73.0	PG29
YZL-1236	1-1/4"	33.4	47.0	58.0	18.0	93.5	PG36
YZL-1442	1-1/2"	38.0	54.0	64.2	21.5	103.0	PG42
YZL-2048	2"	48.8	59.0	86.6	24.0	126.0	PG48

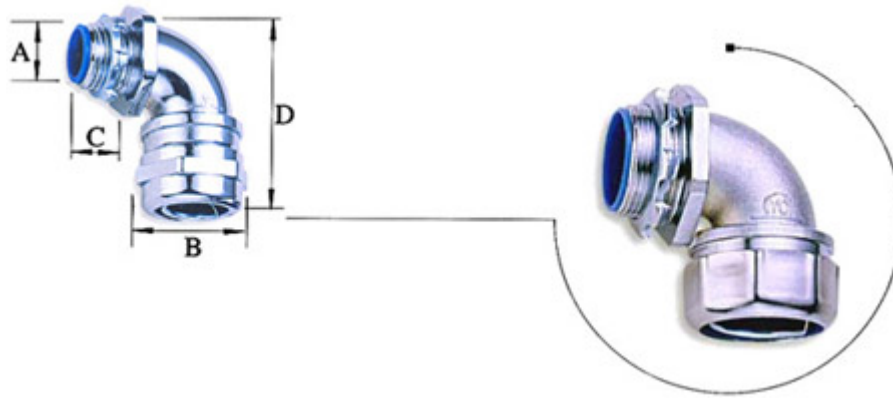

Metric Threads Metal Liquid Tight Conduit Fittings (90 degrees)

Model No.	For Conduit	90 Degrees LT Connector Dimension (mm)					METRIC Thread
		I.D.	A	B	C	D	
YZL-03M16	3/8"	10.7	16	30	13	54.0	M16
YZL-03M20	3/8"	10.7	20	30	13	54.0	M20
YZL-04M20	1/2"	14.7	20	35.5	13	57.0	M20
YZL-06M25	3/4"	19.3	25	40	13	67.0	M25
YZL-10M32	1"	24.4	32	46.5	15	73.0	M32
YZL-10M40	1"	24.4	40	46.5	15	73.0	M40
YZL-12M40	1-1/4"	33.4	40	58.0	15	93.5	M40
YZL-14M50	1-1/2"	38.0	50	64.2	19	103.0	M50
YZL-20M63	2"	48.8	63	86.6	25	126.0	M63

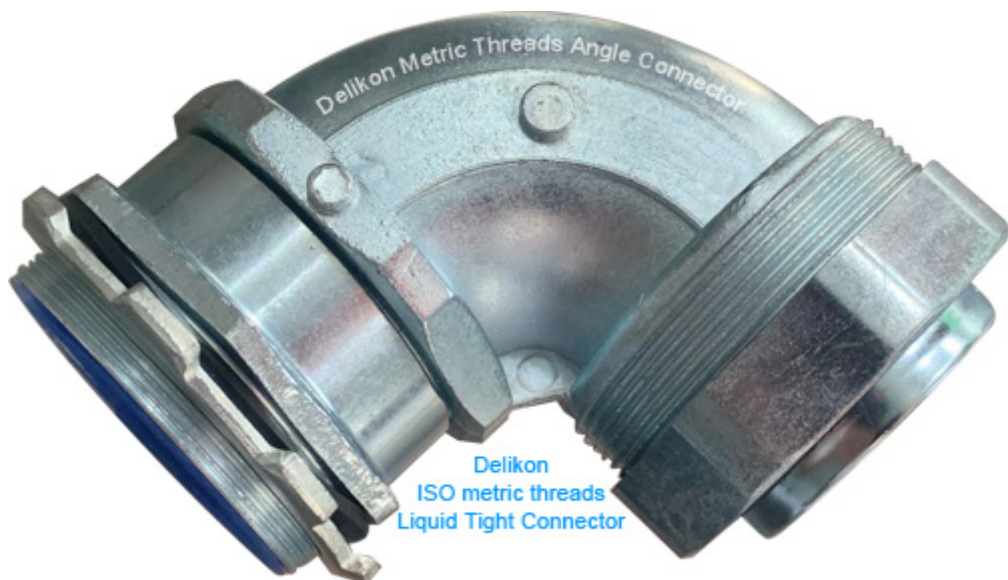



Delikon PG and Metric Thread Liquid Tight Connectors provide a reliable connection for liquid tight flexible metal conduit and PVC coated flexible metal conduit.

Delikon PG and Metric Thread



For power plant, chemical plant, sensor, railway station, and various other equipment, enclosures, junction boxes

Delikon Metal Liquid Tight Connector and Metal Liquid Tight Conduit for Power Plant Electrical Wiring


Modern power plants have an extensive electrical distribution system to provide reliable power to all of the support equipment in the power plant. The utility operating the power plant is in the business of generating electrical power twenty four hours a day, seven days a week. Since electrical power can not be economically stored the plants must be online to produce power when the electrical demand is present. In this regard, the power plants must be highly reliable. Delikon Metal Liquid Tight Connector and Metal Liquid Tight Conduit provides **reliable** protection to cables of generator, large turbines, circulating water pumps, and emergency equipment, ensuring safe operation of the power plants.

Delikon Metal Liquid Tight Connector and Metal Liquid Tight Conduit for Power Plant Electrical Wiring



Delikon 90° Liquid Tight Connector with Metric and PG threads

Delikon Electromagnetic Shielding Zinc Die Casting Connector

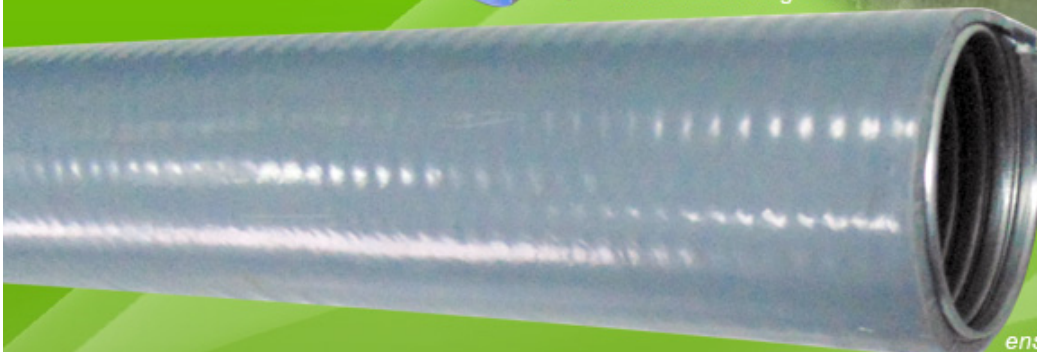

Delikon liquid tight conduit system ensures safe operation of the generator